

## BAND-PASS FILTER

**MFB-1350.2000.S1**

**1350MHz~2000MHz (PASSBAND)**




### SPECIFICATIONS:

Part Number	MFB-1350.2000.S1
Pass Band	1350MHz~2000MHz
Insertion Loss	≤0.7dB
Stop Band Rejection	≥40 dB@DC~900MHz ≥40 dB@2400~9000MHz
Return Loss	≥15dB.
Power Handling	20W
Impedance	50 Ohm
Connector Type	SMA Female
Operating Temperature	-25°C~+65°C
Size	86mm x 60mm x 27mm (Exclusive the connectors and tuning screws)

### Outline Drawing (Unit: mm)

Tolerance:±0.5mm [±0.02 inch]

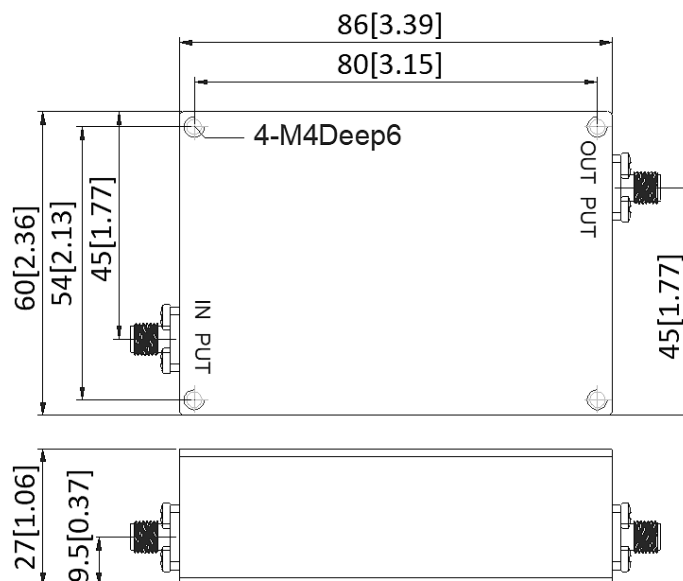

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY