

BAND-PASS FILTER

MFB-3200.5500.S1

3200MHz~5500MHz (PASSBAND)




SPECIFICATIONS:

| | |
|-----------------------|---|
| Part Number | MFB-3200.5500.S1 |
| Pass Band | 3200-5500MHz |
| Insertion Loss | ≤1.0dB |
| Stop Band Rejection | ≥70 dB @ DC-2690MHz ≥70 dB @ 6600-10000MHz |
| VSWR | ≤1.4:1 |
| Average Power | 20W |
| Impedance | 50 Ohms |
| Connector Type | SMA Female |
| Operating Temperature | -25°C~+65°C |
| Size | 50mm x 23mm x 12mm |

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

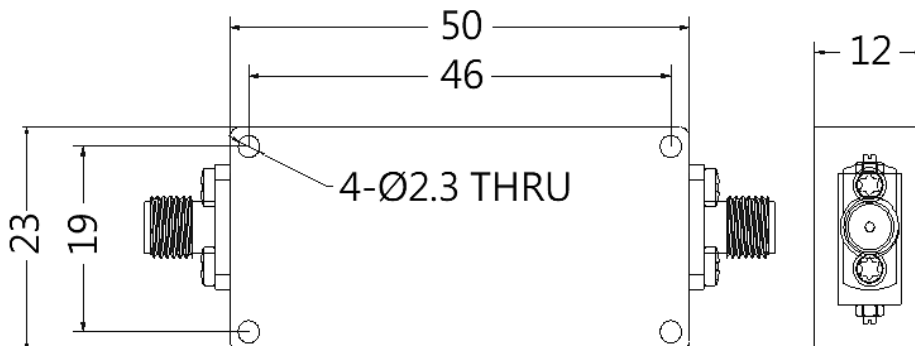

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

