

NOTCH FILTER

MFN-24000.24250.V1

24000MHz-24250MHz (REJECT BAND)



MVE's Notch filter can cut the guard band and preserve the band which you need in the specified frequency range. This type of filter is especially useful since you want to cut the band which is so closed to the in band. The products possess so superior performance with rejection.

SPECIFICATIONS:

Part Number MFN-24000.24250.V1

Reject Band 24000MHz-24250MHz

Pass Band DC-23000MHz & 25250-40000MHz

Pass Band Insertion Loss 3.0 dB MAX.

Attenuation ≥ 40 dB

VSWR 2.0:1 MAX.

Temperature Range -55 to +85 °C

Average Power ≤ 1 W


Connector Type 2.92mm-female (Stainless Steel)

Surface Finish Black Painting

Size 35mm x 17mm x 10mm

Tolerance: X= ± 0.5 mm

Outline Drawing (Unit: mm)

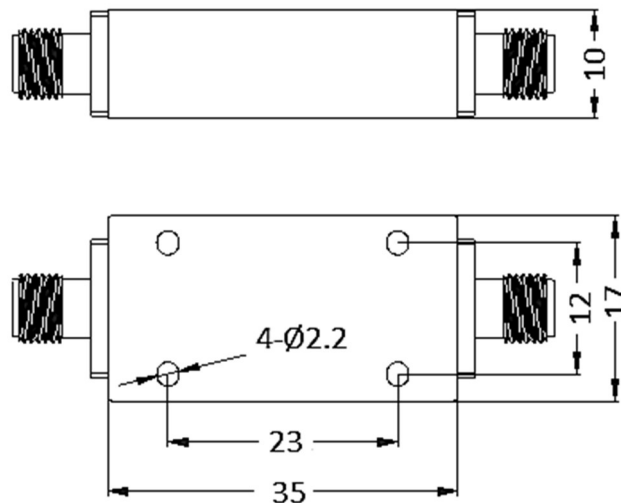

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

