

NOTCH FILTER

MFN-24250.27500.V1
24.25GHz~27.5GHz (REJECT BAND)




MVE's Notch filter can cut the guard band and preserve the band which you need in the specified frequency range. This type of filter is especially useful since you want to cut the band which is so closed to the in band. The products possess so superior performance with rejection.

SPECIFICATIONS:

Part Number	MFN-24250.27500.V1
Reject Band	24.25GHz~27.5GHz
Pass Band	DC~22.75GHz; 29.0~50.0GHz
Insertion Loss	3.0 dB MAX
Attenuation	60dB MIN.
VSWR	2.0:1 MAX.
Storage Temperature	-55°C ~+85°C
Average Power	1W
Connector Type	2.4Mmm Female
Size	35.0mm x 17.0mm x 10mm

Tolerance: $\pm 1\text{mm}$

Outline Drawing (Unit: mm)

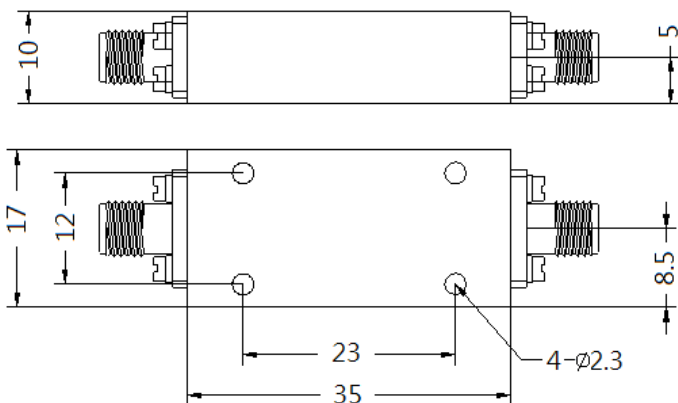

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Report

