

NOTCH FILTER

MFN-2483.2494.S1

2483.35MHz~2494.85MHz (REJECT BAND)




MVE's Notch filter can cut the guard band and preserve the band which you need in the specified frequency range. This type of filter is especially useful since you want to cut the band which is so closed to the in band. The products possess so superior performance with rejection.

SPECIFICATIONS:

Part Number	MFN-2483.2494.S1
Reject Band	2483.35MHz~2494.85MHz
Pass Band	DC~2468.35MHz & 2509.85~5000MHz
Pass Band Insertion Loss	2.0dB Max.
Attenuation	40dB Min
VSWR	2.0:1 Max
Temperature	0 to +60°C
Power	20W
Connector Type	SMA Female
Size	157mm x22mm x 32mm

Outline Drawing (Unit: mm)

Tolerance: X= ±0.5

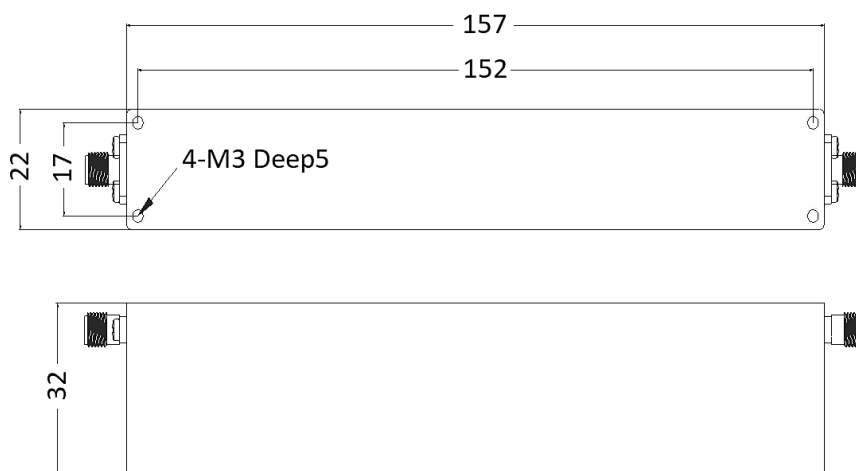

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

