

NOTCH FILTER

MFN-400.460.S1

400MHz~460MHz (REJECT BAND)




MVE's Notch filter can cut the guard band and preserve the band which you need in the specified frequency range. This type of filter is especially useful since you want to cut the band which is so closed to the in band. The products possess so superior performance with rejection.

SPECIFICATIONS:


Part Number	MFN-400.460.S1
Reject Band	400MHz~460MHz
Pass Band	DC-390MHz & 480-1500MHz
Insertion Loss	2.0dB MAX.
Attenuation	60dB Min.
VSWR	2.0:1 MAX.
Temperature	0°C to +50°C
Average Power	≤100W
Connector Type	SMA-Female
Size	210mm x 160mm x 55mm

Outline Drawing (Unit: mm)

Tolerance: ±0.5mm

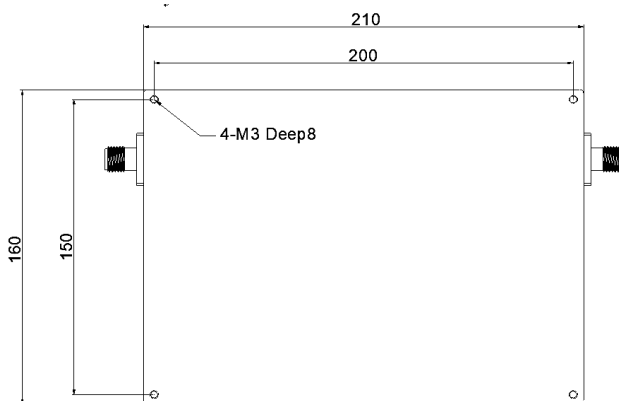

Typical Test Report

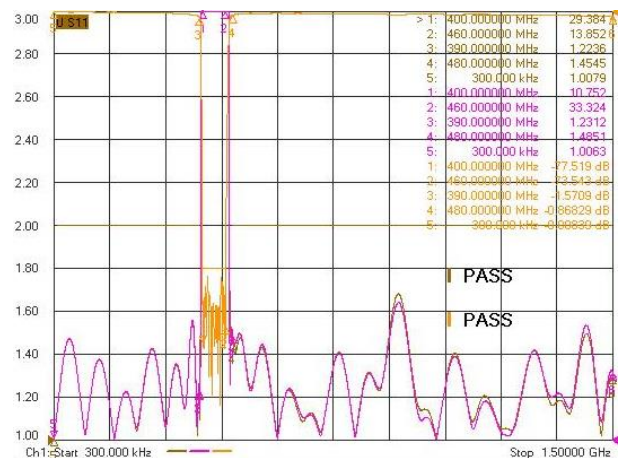

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

