

# COAXIAL ADAPTER

**1.0mm-1.85mm  
Precision Series**

## Features


- ✓ Frequency up to 67GHz
- ✓ High performance design
- ✓ Low VSWR

## Specifications:

<b>PART NUMBER</b>	<b>MVE1126</b>
<b>DESCRIPTION</b>	1.0mm Female To 1.85mm Male, 67GHz Adapter/ Stainless
<b>ELECTRICAL</b>	FREQUENCY : DC-67GHz IMPEDANCE: 50Ω VSWR: 1.5:1 MAX. INSERTION LOSS: <math><0.05 * \text{sqrt}(f\_GHz)</math> dB OPERATING TEMPERATURE: - 55~+165°C
<b>MATERIALS</b>	BODY: STAINLESS STEEL, PASSIVATED COUPLING NUT: STAINLESS STEEL, PASSIVATED INSULATOR: PEI PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD-PLATED

TOLERANCE= ±0.5MM

## Outline Drawing (Unit: mm)

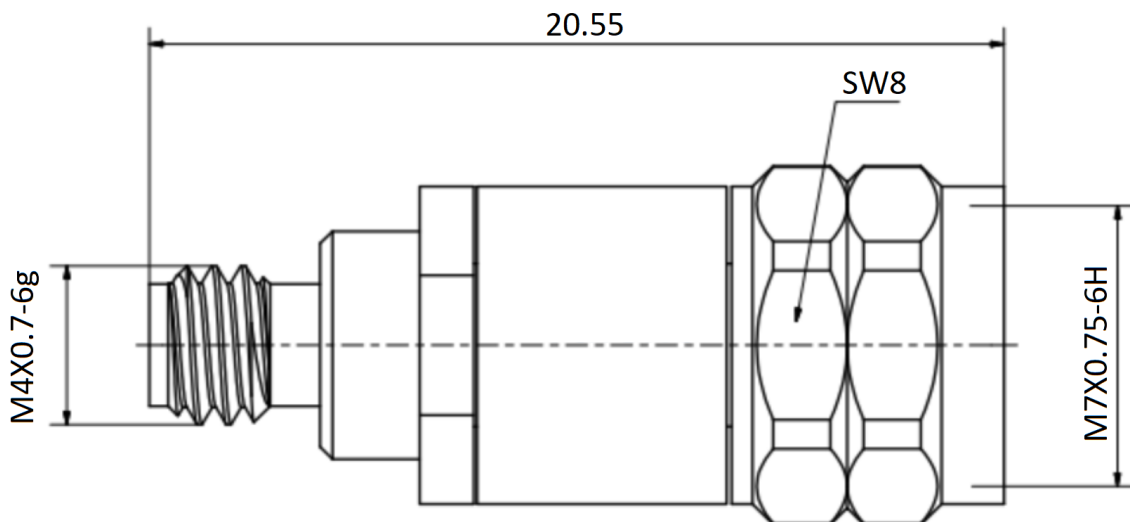

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

