

WAVEGUIDE ADAPTER

1.0mm-WR12


Features

- ✓ Full Waveguide Band Coverage From 60GHz to 90 GHz
- ✓ Low Insertion Loss and VSWR
- ✓ DC Open Circuit


Specifications

PART NUMBER	MVE11371
DESCRIPTION	1.0mm Male To WR12, 60-90GHz Waveguide Adapter
ELECTRICAL	
FREQUENCY : 60-90GHz WAVEGUIDE: WR12 VSWR: 1.5:1 MAX (Typ.) INSERTION LOSS: 1.0dB (Typ.) POWER HANDLING: 10W (CW) FLANGE: UG387/U	
MATERIALS	
BODY: ALUMINUM FINISH: GOLD PLATED	

Outline Drawing (Unit: mm)

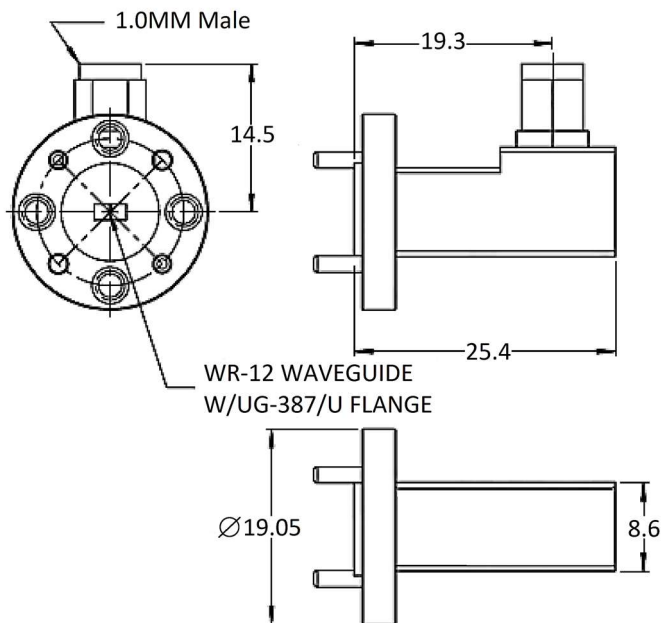

Typical Test Result

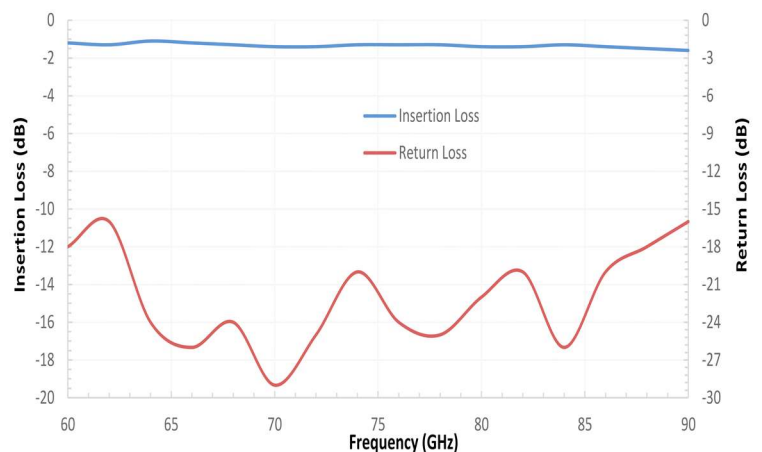

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

