



COAXIAL ADAPTER

1.0mm-1.85mm Precision Series

Features


- ✓ Frequency up to 67GHz
- ✓ High performance design
- ✓ Low VSWR

Specifications:

PART NUMBER	MVE1126
DESCRIPTION	1.0mm Female To 1.85mm Male, 67GHz Adapter/ Stainless
ELECTRICAL	FREQUENCY : DC-67GHz IMPEDANCE: 50Ω VSWR: 1.5:1 MAX. INSERTION LOSS: <math><0.05 * \text{sqrt}(f_GHz)</math> dB OPERATING TEMPERATURE: - 55~+165°C
MATERIALS	BODY: STAINLESS STEEL, PASSIVATED COUPLING NUT: STAINLESS STEEL, PASSIVATED INSULATOR: PEI PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD-PLATED

TOLERANCE= ±0.5MM

Outline Drawing (Unit: mm)

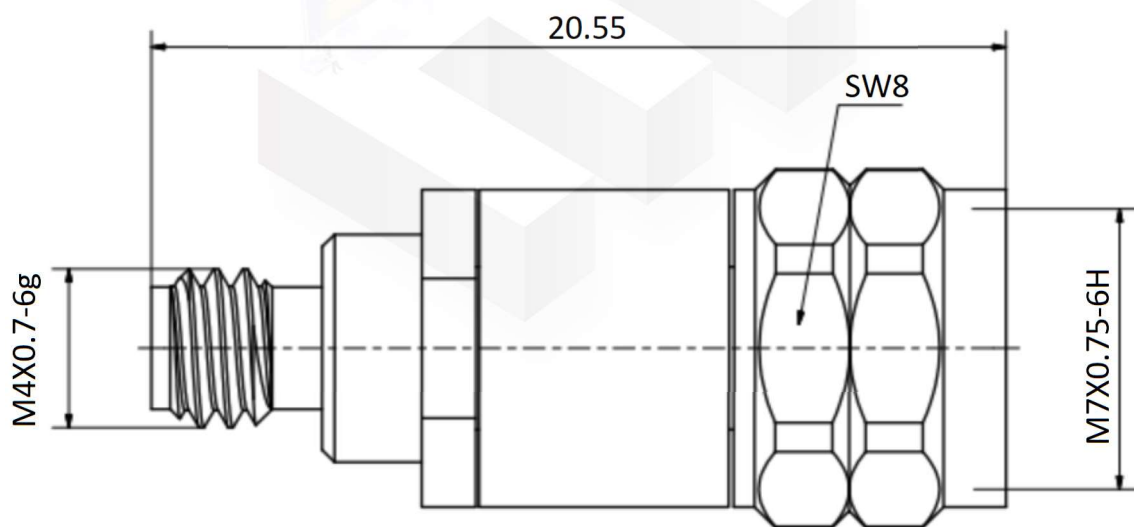

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

