

ELECTRICAL DATA

FREQUENCY : DC-8GHz

IMPEDANCE: 50Ω

VSWR: 1.5:1 MAX. @8GHz

DIELECTRIC WITHSTANDING VOLTAGE: 250 Vrms

WORKING VOLTAGE: 170 Vrms MAX.

INSULATION RESISTANCE: 500Mega Ohms

CENTER CONTACT RESISTANCE: 70 mini Ohm

OUTER CONTACT RESISTANCE: 20 mini Ohm


MECHANICAL DATA

DURABILITY(MATING/UNMATING):10000 Cycles


APPLICATION



Fully mating with MM8030

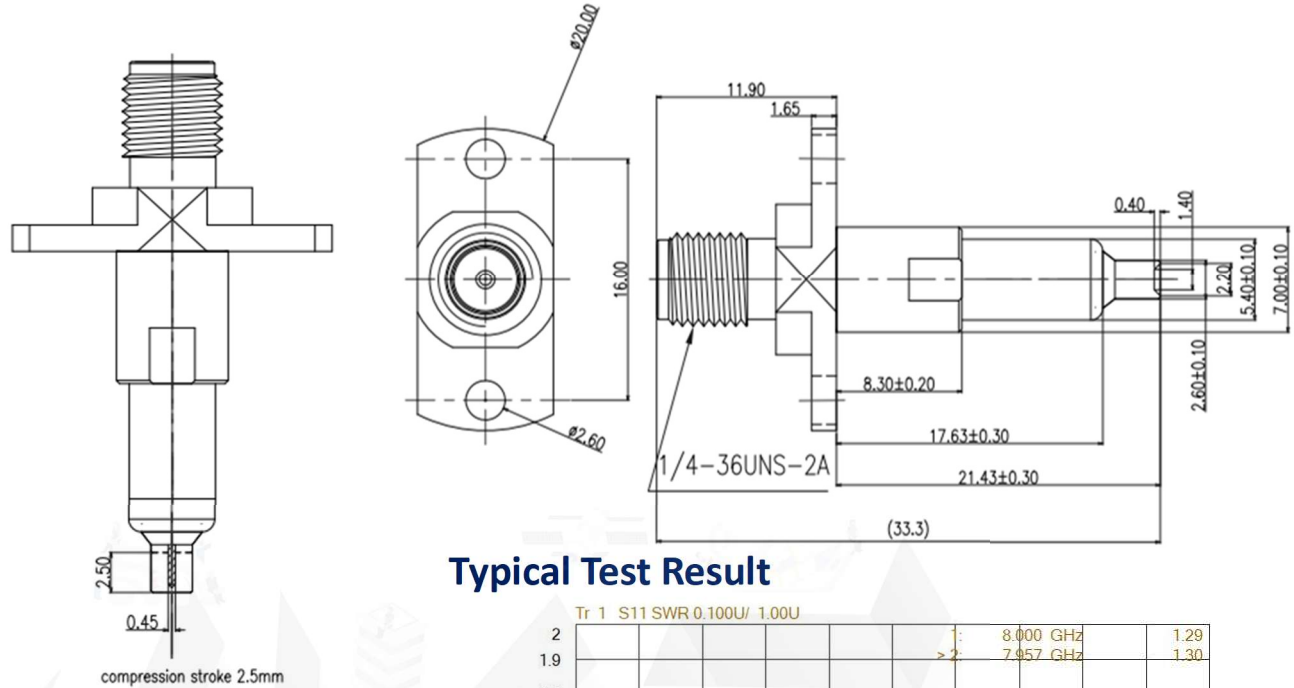

Typical Test Result

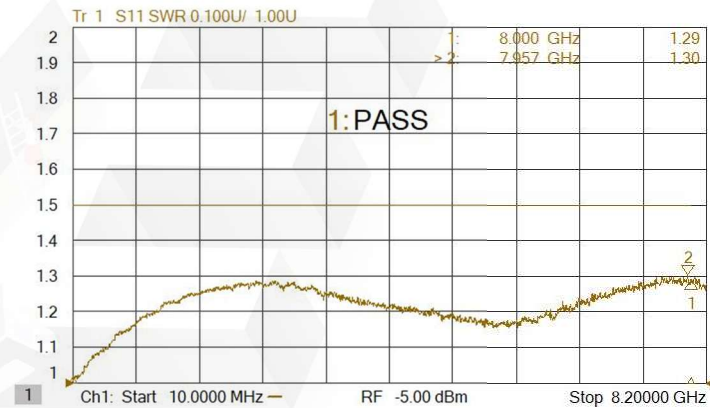

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS, GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
CENTER PIN	BRASS, GOLD PLATED	TITLE	
SPRING	SUS304	SMA Female To MM8030 Test Probes(Pin:A),	
INSULATOR	TEFLON	DC-8GHz	

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

MVE 芝程科技有限公司
Marvelous Microwave Inc.
www.micro-mve.com sales@micro-mve.com +886-2-2602-0660



PART NO.	MVE1961H-A1	REV	3.0
SIZE: A	SHEET: 1/1	SCALE:	